

### HKIT

Heat Shrinkable Indoor Terminations for 6.35/11 (12)kV to 12/20 (24)kV, single-core plastic insulated cable with tape/wire screen

#### Design:

Typical contents of the kit:

- Crimp lug and mechanical lug are available as optional.
- Stress relief mastic and sealing mastic
- Stress control tubes for stress relief
- Earthing materials
- Anti-tracking insulation tube
- Anti-tracking rain sheds are optional

#### Application:

Indoor termination Type HKIT designed to cover single-core plastic insulated cables (with PVC, PE, XLPE, and EPR outer sheath) with copper wire/tape screen. The designs cover a wide application cross section.



#### Feature:

- High mechanical strength
- Wide cross section range suitable for all types of connectors
- Reduced size for compact equipment
- Unlimited shelf life and allows immediate reenergizing

#### Ordering Information:

Voltage rate $U_0/U(U_m)$	Type	Cross section(mm <sup>2</sup> )	Cable type(unarmoured)	Lug type
6.35/11 (12)kV	HKIT-11/1x50-95	50-95	UA	C/M
	HKIT-11/1x120-150	120-150	UA	C/M
	HKIT-11/1x185-240	185-240	UA	C/M
	HKIT-11/1x300-400	300-400	UA	C/M
8.7/15 (17.5)kV	HKIT-15/1x50-95	50-95	UA	C/M
	HKIT-15/1x120-185	120-185	UA	C/M
	HKIT-15/1x240-300	240-300	UA	C/M
12/20 (24)kV	HKIT-20/1x50-95	50-95	UA	C/M
	HKIT-20/1x120-185	120-185	UA	C/M
	HKIT-20/1x240-300	240-300	UA	C/M

Example: Kit part number : HKIT-11/1x300 UA-C

Where: 11-voltage rate; 1-number of cable cores; 300-cross section of cable conductor; UA-unarmored; C- crimp type lugs.

No lugs supplied unless specified.

Earthing materials: Earth braid and roll spring.

## Medium Voltage Heat Shrinkable Outdoor Terminations

### HKOT

Heat Shrinkable Outdoor Terminations for 6.35/11 (12)kV to 12/20 (24)kV, single-core plastic insulated cable with tape/wire screen


#### Design:

Typical contents of the kit:

- Stress control/void filling mastic
- Sealing mastic
- Stress control tube
- Earthing materials
- Anti-tracking insulation tube
- Anti-tracking rain sheds

#### Application:

Outdoor terminations Type HKOT designed to cover single core plastic insulated cables (with PVC, PE, XLPE, and EPR outer sheath) with copper wire/tape screen. The designs cover a wide application cross section.

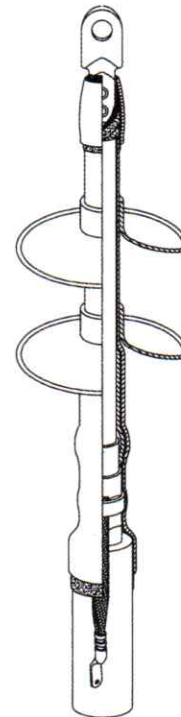

#### Feature:

- High mechanical strength
- Wide cross section range suitable for all types of connectors
- Compact dimensions
- Increased UV and weathering stability
- Unlimited shelf life and allows immediate reenergizing

#### Ordering Information:

Voltage rate $U_n/U(U_m)$	Type	Cross section(mm <sup>2</sup> )	Cable type(armoured)	Lug type
6.35/11 (12)kV	HKOT-11/1x50-95	50-95	UA	C/M
	HKOT-11/1x120-150	120-150	UA	C/M
	HKOT-11/1x185-240	185-240	UA	C/M
	HKOT-11/1x300-400	300-400	UA	C/M
8.7/15 (17.5)kV	HKOT-15/1x50-95	50-95	UA	C/M
	HKOT-15/1x120-185	120-185	UA	C/M
	HKOT-15/1x240-300	240-300	UA	C/M
12/20 (24)kV	HKOT-20/1x50-95	50-95	UA	C/M
	HKOT-20/1x120-185	120-185	UA	C/M
	HKOT-20/1x240-300	240-300	UA	C/M

Example: Kit part number : HKOT-11/1x300 UA-C

Where: 11-voltage rate; 1-number of cable cores; 300-cross section of cable conductor; UA-unarmoured; C- crimp type lugs.

No lugs supplied unless specified.

Earthing materials: Earth braid and roll spring.