

Medium Voltage Heat Shrinkable Indoor Terminations

HKIT

Heat Shrinkable Indoor Terminations for 6.35/11 (12)kV to 12/20 (24)kV, 3-core plastic insulated cable with tape screen & SWA


Design:

Typical contents of the kit:

- Crimp lug and mechanical lug are available as optional.
- Stress relief mastic and sealing mastic
- Stress control tubes for stress relief
- Earthing materials
- Anti-tracking insulation tube
- Anti-tracking rain sheds are optional

Application:

Indoor terminations Type HKIT designed to cover 3-core plastic insulated cables (with PVC, PE, XLPE, EPR outer sheath) with steel wire/tape armour, copper wire/tape screen. The designs cover a wide application cross section.

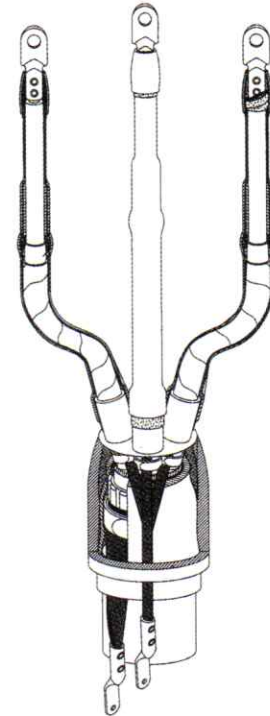

Feature:

- High mechanical strength
- Wide cross section range suitable for all types of connectors
- Reduced size for compact equipment
- Unlimited shelf life and allows immediate reenergizing

Ordering Information:

Voltage rate $U_0/U(U_m)$	Type	Cross section(mm ²)	Cable type(armoured)	Lug type
6.35/11 (12)kV	HKIT-11/3x50-95	50-95	A	C/M
	HKIT-11/3x120-150	120-150	A	C/M
	HKIT-11/3x185-240	185-240	A	C/M
	HKIT-11/3x300-400	300-400	A	C/M
8.7/15 (17.5)kV	HKIT-15/3x50-95	50-95	A	C/M
	HKIT-15/3x120-185	120-185	A	C/M
	HKIT-15/3x240-300	240-300	A	C/M
12/20 (24)kV	HKIT-20/3x50-95	50-95	A	C/M
	HKIT-20/3x120-185	120-185	A	C/M
	HKIT-20/3x240-300	240-300	A	C/M

Example: Kit part number : HKIT-11/3x300 A-C

Where: 11-voltage rate; 3-number of cable cores; 300-cross section of cable conductor; A-the type of cable armour, SWA/AWA/STA; C- crimp type lugs.

No lugs supplied unless specified.

Earthing materials: Earth braid, roll spring and armour clamp.

Medium Voltage Heat Shrinkable Outdoor Terminations

HKOT

Heat Shrinkable Outdoor Terminations for 6.35/11 (12)kV to 12/20 (24)kV, 3-core plastic insulated cable with tape/wire screen & SWA


Design:

Typical contents of the kit:

- Stress control/void filling mastic
- Sealing mastic
- Stress control tube
- Earthing materials
- Support ring is optional.
- Anti-tracking insulation tube
- Anti-tracking rain sheds

Application:

Outdoor terminations Type HKOT designed to cover 3-core plastic insulated cables (with PVC, PE, XLPE, and EPR outer sheath) with steel wire/tape armour, copper wire/tape screen. The designs cover a wide application cross section.

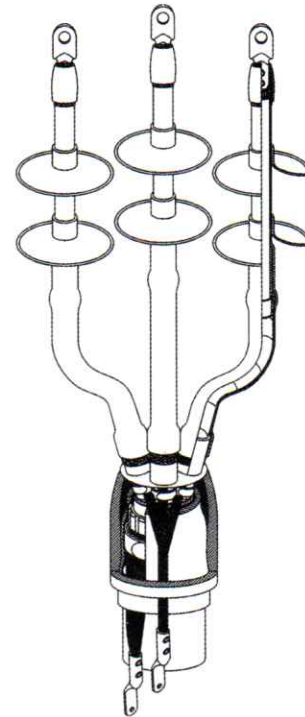

Feature:

- High mechanical strength
- Wide cross section range suitable for all types of connectors
- Compact dimensions
- Increased UV and weathering stability
- Unlimited shelf life and allows immediate reenergizing

Ordering Information:

Voltage rate $U_0/U(U_m)$	Type	Cross section(mm ²)	Cable type(armoured)	Lug type
6.35/11 (12)kV	HKOT-11/3x50-95	50-95	A	C/M
	HKOT-11/3x120-150	120-150	A	C/M
	HKOT-11/3x185-240	185-240	A	C/M
	HKOT-11/3x300-400	300-400	A	C/M
8.7/15 (17.5)kV	HKOT-15/3x50-95	50-95	A	C/M
	HKOT-15/3x120-185	120-185	A	C/M
	HKOT-15/3x240-300	240-300	A	C/M
12/20 (24)kV	HKOT-20/3x50-95	50-95	A	C/M
	HKOT-20/3x120-185	120-185	A	C/M
	HKOT-20/3x240-300	240-300	A	C/M

Example: Kit part number : HKOT-11/3x300 A-C

Where: 11-voltage rate; 3-number of cable cores; 300-cross section of cable conductor; A-the type of cable armour, SWA/AWA/STA; C- crimp type lugs.

Earthing materials: Earth braid, roll spring and armour clamp.

No lugs supplied unless specified.